



J2950

TRACKED JAW CRUSHER

The New J2950 is a more Streamlined and Powerful Tracked Jaw Crusher designed with Contractors in mind.


With its user friendly design, the J2950 is now easier to manoeuvre onsite and transport around various markets due to its new weight and dimensions while still maintaining the original Jaw Crushing Unit.

Featuring SMI's new and improved step deck vibrating feeders, allowing a higher throughput tonnage, improved material separation quality and the ability to handle dry, damp or wet material – the J2950 is a highly versatile Jaw Crusher that can be set up in minutes!

The J2950 can be fed by Excavator as a standalone unit and also integrates easily into the SMI range of Crushers and Screeners.

Features & Benefits

- Up to 350+ Tonnes per Hour Production Rate
- 2 Deck Independent Pre-Screen as Standard
- New Step Deck Vibrating Feeders & Hydraulic Cribs
- Innovative Design for Fast Setup and Easy Transportation

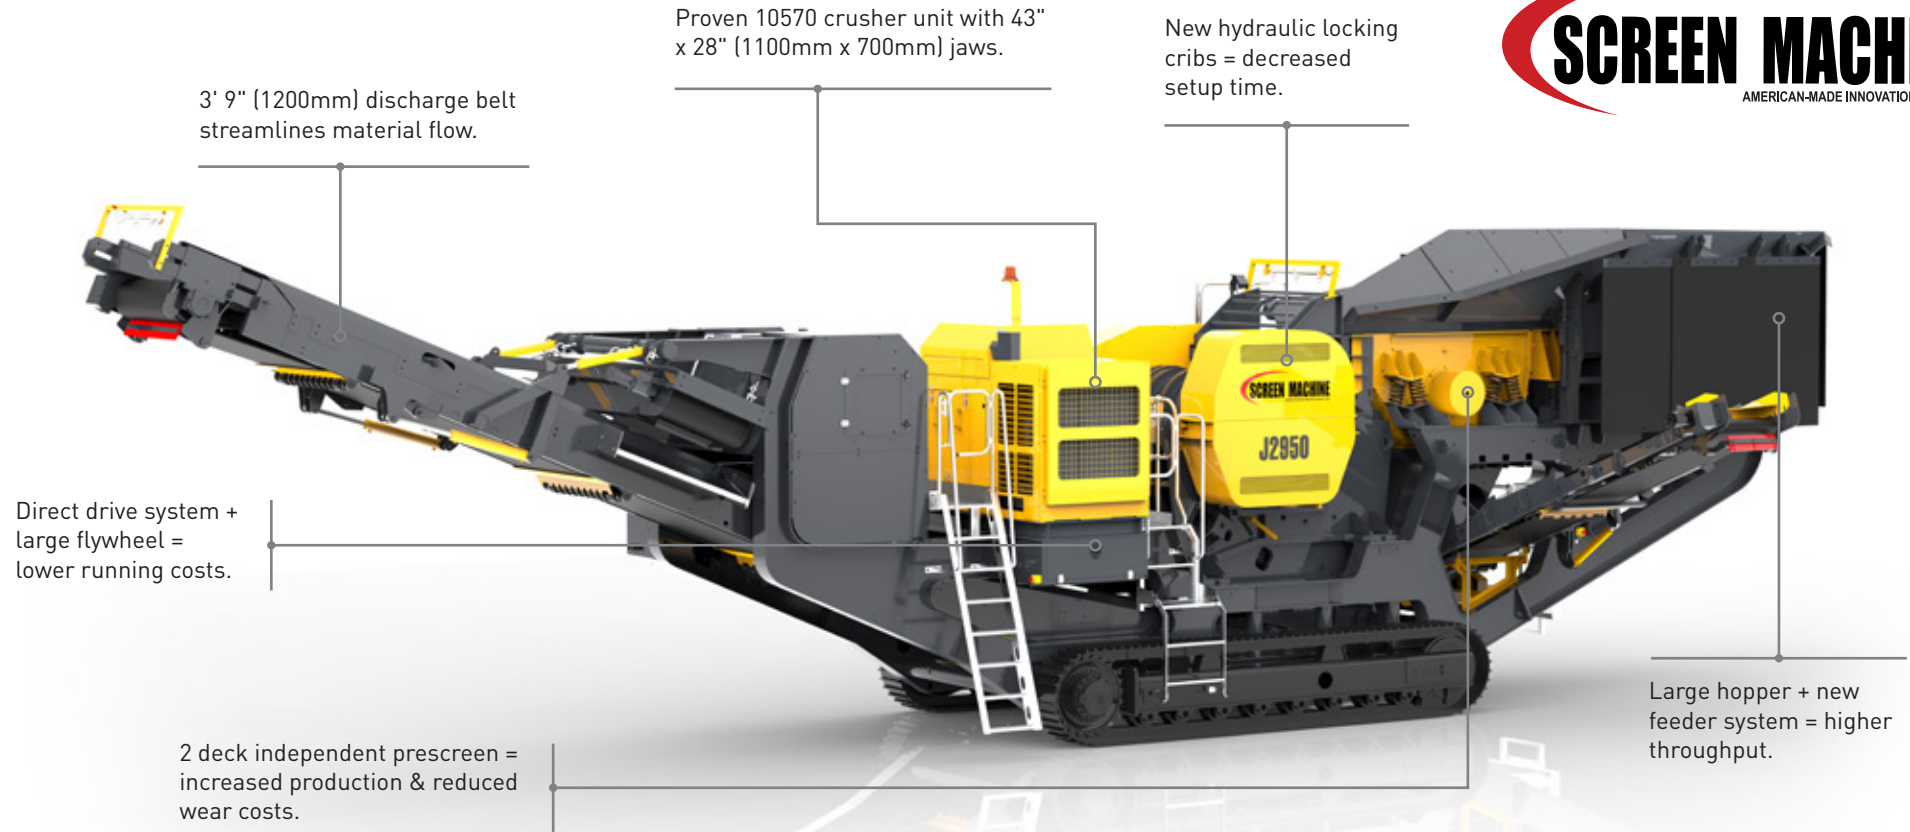

3' 9" (1200mm) discharge belt streamlines material flow.

Proven 10570 crusher unit with 43" x 28" (1100mm x 700mm) jaws.

New hydraulic locking cribs = decreased setup time.

Direct drive system + large flywheel = lower running costs.

2 deck independent prescreen = increased production & reduced wear costs.

Large hopper + new feeder system = higher throughput.

PERFORMANCE SPECIFICATION* * Depending on application

Production Rate*	Max Feed Size	Reduction Ratio
up to 350 TPH	28' (700mm)	up to 4:1
Engine Size	Pre Screen	
CAT 7.1 225kW	Yes	

DIMENSION SPECIFICATION* * Depending on material density and set-up

TRANSPORT DIMENSIONS		
Height	Width	Length
11' 5" (3,480mm)	10' 8" (3,260mm)	54' 0" (16,450mm)
MAX WORKING DIMENSIONS		
Width	Length	Weight (est)
18' 4" (5,590mm)	53' 0" (16,150mm)	48,810 kg (107,610 lbs)